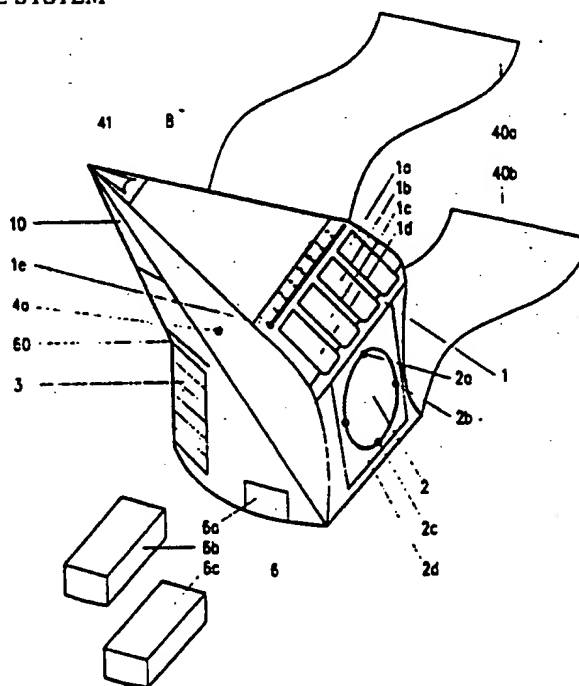


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b>  <b>H03M 11/00, H04B 10/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 91/07826</b>  <b>(43) International Publication Date:</b> 30 May 1991 (30.05.91)
<b>(21) International Application Number:</b> PCT/US90/06823 <b>(22) International Filing Date:</b> 23 November 1990 (23.11.90)  <b>(30) Priority data:</b> 440,771 22 November 1989 (22.11.89) US  <b>(60) Parent Application or Grant .</b> <b>(63) Related by Continuation</b> US 440,771 (CIP) Filed on 22 November 1989 (22.11.89)  <b>(71)(72) Applicant and Inventor:</b> RUSSELL, David, C. [US/ US]; 2967 Aldgate Drive, Bloomfield Hill, MI 48013 (US).		<b>(74) Agents:</b> GROSSMAN, Jon, D. et al.; Dickstein, Shapiro & Morin, 2101 L Street, N.W., Washington, DC 20037 (US).  <b>(81) Designated States:</b> AT, AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH, CH (European patent), CM (OAPI patent), DE (Utility model), DE (European patent), DK, DK (Euro- pean patent), ES, ES (European patent), FI, FR (Euro- pean patent), GA (OAPI patent), GB, GB (European patent), GR (European patent), HU, IT (European pa- tent), JP, KP, KR, LK, LU, LU (European patent), MC, MG, ML (OAPI patent), MR (OAPI patent), MW, NL, NL (European patent), NO, RO, SD, SE, SE (European patent), SN (OAPI patent), SU, TD (OAPI patent), TG (OAPI patent), US.  Published With international search report.

**(54) Title:** COMPUTER CONTROL SYSTEM**(57) Abstract**

A bidirectionally operable, ergonomically-shaped, hand-attachable computer control system is disclosed. A hand-attachable user input device (10) transmits computer command, control, and other input signals to a base transceiver device (20), which detects and converts input device radiated signals into electrical signals to which the computer (30) is programmed to respond. A system is disclosed wherein multiple computers can be controlled, using multiple input devices (101-110), and control can be achieved by multiple users, to the extent of control privileges authorized by predetermined authorization plans.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	ML	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LJ	Liechtenstein	SU	Soviet Union
CI	Côte d'Ivoire	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

COMPUTER CONTROL SYSTEMBACKGROUND OF THE INVENTIONFIELD OF THE INVENTION

The present invention relates to remote control systems. More particularly, the present invention relates to the remote entry of control signals into a computer system; also, the invention relates to the remote entry of other types of input and control data into a computer system or multiple computer systems.

DESCRIPTION OF THE PRIOR ART

In recent years, the process of entering certain types of data and control inputs into computer systems has become significantly simplified.

Traditionally, data entry to a computer, and other computer control and input operations, were accomplished using a standard computer keyboard data entry device. However, for many types of input and control situations, the standard keyboard proved to be inefficient, inconvenient, and time consuming.

Thus, in due course, it became apparent to inventors and computer users that input alternatives to the keyboard were desirable. Such auxiliary and/or alternative input devices such as light pens, joysticks, and the so-called mouse were invented. These new input devices proved

- 2 -

to be viable and timesaving alternatives to the keyboard for many types of input and control situations.

Accordingly, over the last several years, such auxiliary and/or alternative input devices have surged in popularity. In particular, the input device known as the mouse appears to have become the single most widely accepted keyboard alternative input device.

The fundamental operating control principle of the mouse relates to the rotation of a spherical "trackball". This trackball is partially exposed on the underside of the device; it protrudes through an aperture of "the mouse's" undermost panel. When the mouse is moved over a flat surface, the trackball can freely rotate within the device.

When the computer user moves the mouse, the exposed portion of the trackball is usually pressed against a flat surface urging the trackball to rotate and generate signals which correspond to pairs of x-axis and y-axis coordinates. The mouse contains means to translate these coordinates into signals to which the attached computer is responsive. Accordingly, when the computer user moves the mouse device across a working surface adjacent to the computer, the cursor indicator on the display screen moves to the location desired by the computer user. Also, the computer user's operation of one or more buttons aboard the mouse affects other control functions on the computer and display such as the selection of computer usage event options.

Notwithstanding contributions of alternative/auxiliary input devices such as the mouse, a number of drawbacks inherent in the mouse have not been eliminated.

- 3 -

One drawback of the mouse is the fact that it is hard-wire attached to the computer whose cursor is being controlled. The connecting cord from the mouse to the computer is subject to the same "umbilical" problems associated with cords on any appliance which needs to move about in order to operate according to design.

Another drawback of the mouse is that a computer user may find the procedure of frequently moving his or her hand back and forth from the keyboard to the mouse to be distracting to their train of thought, time consuming, or inconvenient to optimal operational efficiency.

Still another drawback to be considered is the fact that the mouse requires a prominent space upon the computer user's desk. Also, the mouse requires a dedicated "running area" ideally comprising a smooth flat surface upon which to move. In practice, the typical computer user's desk is very often crowded, and the extra space required for mouse operation can often cause further crowding problems for the computer user. Further, not all computer user's desks offer a hospitable or a sufficiently smooth and flat "running area" surface; this can cause problems for proper operation of the mouse.

A further drawback of the mouse is the susceptibility of the underside of the trackball to introduce dirt and other foreign substances into the body cavity of the mouse.

Also, the mouse is not always capable of perfectly retracing its' path, should the computer user desire to

- 4 -

backtrack exactly. This deficiency can result in discontinuities in tracking and correspondingly discontinuous input events.

Some of the above-noted drawbacks have been partially addressed by some of the newer computer input device designs. For example, some mouse devices are designed to run on special running surfaces, eliminating those problems associated with surface imperfections. However, some of these mouse devices create additional pitfalls for computer users. In the event that the special running surface becomes damaged or becomes lost, imperfect mouse operation can result. Also, the provision of a special running surface consumes no less desktop surface than the conventional mouse requiring no special surface. Although some problems are reduced with the special running surface, no significant additional utility appears to result.

Thus, at this point, the hardwiring problems, the space consumption problems, and the distraction/efficiency problems caused by the mandatory back and forth hand movement of the mouse all remain to be substantially resolved.

Another drawback is that mouse-type devices can be inhospitable for those users who are physically impaired. For those users who have, for example, impaired tactile abilities, the mouse may be an awkward, if not painful, means for inputting information.

Several inventors' have attempted to address the above concerns.

- 5 -

For example, U.S. Patent 4,550,250 illustrates an infrared graphics input device for a computer. A remote infrared light source transmits user input commands to a detector device proximate to the computer. Although the device is wireless, this device appears limited because it must remain within the fixed confines of a small detection field. Also, this device must operate within a virtually dedicated two-dimensional, smooth flat surface. The detector apparatus operates according to continuous tracking input principles and apparently does not allow for any straying out of the detection boundaries for precision inputs; a straying out of these detection boundaries by the graphics input device would appear to inevitably damage precision needed by the detector's trigonometrically oriented position calculating method.

United States Patent 4,578,674 discloses a method and an apparatus for controlling the cursor position on a computer display screen. This device uses both infrared and ultrasonic principles for determining the direction and the velocity of motion of a positioning device which is monitored by a control base detector. Although the device is wireless, this device appears limited as disclosed and illustrated. If in fact this device is satisfactorily functional outside of a two-dimensional plane, while operating from a three-dimensionally defined location in free space, this device appears likely at best to require the computer user to take overly elaborate pains ensuring that the emitter/detector front face of the positioning device is always directly facing the control base.

- 6 -

United States Patent 4,628,541 discloses an infrared battery powered keyboard input device for a microcomputer. Specifically, the patent describes a keyboard device for keyboard data entry to a microcomputer this requires no connecting cord between the keyboard and the controlled microcomputer and it does offer the computer user additional freedom for operating a standard style keyboard input device without hardwiring constraints; however, this device still requires significant space for operation given that it is apparently no more conservative of space than any other standard keyboard. Also, as no separable signal detector unit appears to be available, the keyboard cannot be portable to another computer, unless the computer to which the keyboard is ported is a duplicate microcomputer device. Apparently, the infrared battery operated keyboard likely requires the implementation of a separate mouse if "mouse-type" input commands or functionality/features are either needed by the user or are required for optimal productivity.

These above patents all embody infrared and/or ultrasonic wireless data communications principles. While these inventions do serve as prior art improvements over the preceding basic "mouse-type" design, these inventions stop short of realizing and employing the full potential of data and/or sonic communications.



SUMMARY OF THE INVENTION

In view of the foregoing, it should be apparent that there still exists a need in the art for a method and apparatus for providing an effective means for the remote entry of control signals into a computer. The present invention herein disclosed offers numerous distinct features unavailable heretofore. The present invention simplifies and makes accessible the control of many events associated with the operation of a computer, eliminating the foregoing drawbacks associated with conventional input devices, such as the mouse. With the present invention, the computer user controls diverse computer control events, including data input events, cursor control events, selection of option events available to the user, using a wireless, hand-attachable input device.

It is therefore a primary object of the present invention to provide an input device that is easily attached to the index or other fingers and is virtually effortlessly operated by the computer user's thumb and/or finger pressure upon various switches aboard the wireless input device.

Another object is to provide a thumb and index finger computer control environment. The thumb operated switches comprise a master control thumb switch and a plurality of secondary switches and mode switches. The index finger switch operates the front computer control switch.

- 8 -

A further object of the present invention is to provide single-switch or multiple-switch operation accomplishable with minimum effort.

A further object of the invention is to provide a wide range of basic operating characteristics depending on the user's configuration of the device selected. Different operating features and different operating modes are available to the computer user, using this wireless input device. Moreover, different operating personality modules can be loaded into the wireless input device such that multiple removably insertable operating environments, each having a plurality of operating modes, are created; each of the modules contains a different basic format of operation for the input device. For example, the personality module can provide a number of security and access-safeguarding features based upon the needs of the computing environment, as defined by a duly authorized system security administrator.

An additional object of the invention is to receive signals radiated from the input device, in a base transceiver device which, is in turn, connected into the computer being controlled.

Yet another object of this invention is to provide an input device which is configurable to provide for an interoperable computing environment wherein a group or groups of computers can be controlled by one or more of the computer input devices.

Another object of the invention is that it is cordless and unbounded by either typical hardwiring

- 9 -

constraints or narrow boundaries which are counterproductive to the simplest operation. Due to the provision of a sensitive signal radiating means and sensing means, reliable transmission and reception of precise input signals can be accomplished without rigorous pointing or aiming of the input device.

A further object is that in a wider scale implementation, such as an enterprise-wide environment, interoperability can be achieved among multiple input devices and computers. For example, virtual simultaneous control of multiple computers is achieved by directing different control signals radiating out of the same input device.

A yet additional object of the present inventions is to provide an input device that operates from any three-dimensional location which is sufficiently proximate to the base transceiver. In other words, the input device does not require a smooth, flat, dedicated surface and/or a special input device as a "running area", as do devices of the prior art. As a result, more convenient operation occurs and premium desk space (which would be otherwise unavailable with devices of the prior art), is now rendered available for other users.

A further object of the invention is to give the computer user finger-tip control since the present invention can be attachable to the index finger and simply operated by the thumb and/or index finger. Such control allows the user to better keep his train of thought insofar as no back and forth hand movements are necessary from keyboard to input device. This capability can increase

- 10 -

productivity significantly in advanced applications, where extensive use of keyboard and input devices are required, such as in computer assisted design or manufacturing applications. Coupled with existing software using mouse interfaces, the present invention streamlines input and control. For example, a team of designers can virtually simultaneously work with a single computer to develop design diagrams around a conference table, using their respective hand-attachable input devices. Additionally, the present invention, when implemented in a computer gaming environment, allows multiple players to simultaneously compete in the same event.

A further object of this invention is to provide a control unit for an enterprise-wide computer security plant, using the interoperability characteristics of the present invention, wherein access can be differently constrained from individual user to individual user (and from device to device) depending on each user's (and device's) specific access and authorization privileges.

An additional object of this invention is to provide a device that addresses the special needs of the handicapped. For example, people, who for one reason or another, find usage of mouse-type input devices impossible or very inconvenient, can more easily communicate with their computer using the present invention.

It is another object of this invention to provide an input device that streamlines computer input, allows for any extent of security that is deemed appropriate for the implementation environment, and allows extreme portability of computing for any user.

- 11 -

Briefly described, these and other objects of the invention are accomplished with its apparatus aspects by providing a wireless computer input device adapted to communicate with a base transceiver. The input device is adapted, in one embodiment, to be mounted on the user's index finger in order to be easily operable by the thumb and index finger. The unit includes a personality module which can be set to any one of multiple personality environments by the user. The unit also includes multiple mode setting means within each personality module. Function control switches easily operable by the thumb and index finger are further provided which are settable in each mode.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of the wireless hand attachable computer user input device 10, and companion base transceiver device 20.

Figure 2 is a block diagram overview of the hardware implementation of the computer control system;

Figure 3 is a block diagram of basic functional modules of input device 10;

Figure 4 is a detailed schematic block diagram of the user input transmitter shown in Fig. 3;

Figure 5 is a block diagram of the base transceiver device 20;

Figure 6 is a detailed block diagram of the base transceiver device of Fig. 5;

Figure 7 is a top perspective view of the input device 10;

Figure 8 is a bottom perspective of the device 10;

Figure 9 is a bottom perspective view of a second embodiment of the device 10;

Figures 10A-10B are perspective views of the input device 10 in use;

- 13 -

Figure 11 is a perspective view of a second embodiment of the input device in use;

Figure 12 shows certain screen views of the operational sequences of the device 10;

Figure 13 illustrates a flowchart illustrating the security logic implementation environment for the device 10;

Figure 14 shows a block diagram of an enterprise-wide computer input system;

Figure 15 shows a block diagram of an extended enterprise-wide system; and

Figures 16A and 16B are block diagrams illustrating byte maps of different message packets of signals 12 of Fig. 1.

- 14 -

**DESCRIPTION OF THE PREFERRED EMBODIMENTS**

Referring now to Figure 1 wherein like reference numerals refer to like parts, there is shown a wireless computer user input device 10, which transmits and receives infrared and/or other electromagnetic signals 12 such as RF, microwave or acoustic transmissions. If acoustic signals are used, the computer user input device 10 and base transceiver device 20 have appropriate acoustic transmission and reception circuitry. Such circuitry can be replaced by using well-known devices in order for the present invention to operate in the other previously mentioned signal transmission embodiments. In the instant embodiment, a detailed description of the signal transmission and reception circuitry is provided.

The signals 12 are transmitted from the computer user input device 10 in response to the computer user's manual operation of switches mounted thereupon (not shown). Specifically, after the user has actuated one or more switches on the input device 10, infrared and/or other transmitted signal-types 12 are generated within input device 10, and these signals are then passed through infrared lens 8 (see Fig. 7). The output signals 12 then propagate through free space and onto the base transceiver 20. Upon detection by the base transceiver 20, the signals 12 are demodulated, deencrypted, if applicable, and converted to applicable computer control signals and/or other input event signals. A detailed description of the transceiver 20 operation is provided further below.



- 15 -

These computer control signals are relayed into computer 30 via cable 28. Computer 30 is connected to terminal 18, and/or any other interfaceable receiver device. In the embodiment of Figure 1, display screen 19 of terminal 18 is responsive to command, control, and other output/display signals from the computer 30, such that the desired effects of user-initiated signals 12 are displayed on screen 19, and/or elsewhere, at the user's option.

In addition, the base transceiver 20 includes a sonic receiver element 42 adapted to receive and transmit the sonically produced signals from the input device 10.

The base transceiver 20 further includes a lens 21 adapted to pass infrared signals 12 provided from the input device 10. Other features of the base transceiver 20 include a keyboard panel 26. The keyboard panel 26 (where implemented) allows the user to type in an authorization code lock such that physical access to the base transceiver 20 can be programmably controlled by the user possessing the correct authorization codes. The purpose of the lock is to enable or disable access to ports 22 and 24.

Ports 22, 24 are provided on the base transceiver 20 for recharging the power supply in the input device 10. Specifically, port 22 (when implemented) is provided for a guest device which is where multiple input devices are provided to control one or more computers. Port 24 is used for recharging the home input device 10. The input device 10, as shown in Fig. 8, includes a female plug 11a coupled to receive electrical charges for an internal power supply (i.e., battery) in unit 10. The female coupling 11a is adapted to plug into a male coupling 116 respectively

- 16 -

located within each of the ports 22, 24 in the base transceiver 20.

The computer, screen 19 inherently includes pre-programmed cartesian or other conventional positioning areas representing coordinate positions provided by the input device 10. The ordinate axis 17b and the abscissa axis 17c are shown by the dotted lines. In addition, an origin 17a is provided through which a Z-axis (not shown) is available for three-dimensional display.

Additionally, the computer 18 has a floppy or other storage disc drive 32 which is adapted to receive a floppy or other suitable disc package 35 containing digitally encoded instructions 33.

Referring now to Figure 2, a block diagram overview of the basic computer control system is shown. The basic control elements include the wireless input device 10 (shown in Fig. 1), the base transceiver device 20 (also shown in Fig. 1) and the computer 30 controlled by the wireless input device 10 and the base transceiver 20.

Figure 3 illustrates the preferred hardware arrangement and detailed operations for performing basic signal-generating, signal processing, and signal-terminating functions for the input device 10.

Specifically, the manual, digital, or thumb operation of input device 10's switches results in the generation of different electrical signals which are propagated out of the switch position sensing module shown as module 100.

- 17 -

The electrical signals produced by module 100 indicate three separate but interrelated fields: (1) the actual switch position of the secondary control switches 1a-1d shown in Fig. 7, (2) the switch mode setting position 102 which controls functionality of switches 1a-1d as determined by the presetting of switch 1e of (Fig. 7) and (3) the operating environment (i.e., personality) of the system as defined by the personality module 6, which is plugged into or set in the device 10 (Fig. 7).

The signal produced by the position sensing module 100 is encoded so that the signal is then treated by an encoding/decoding module 110. A series of intermediate electrical signals provided from the encoder/decoder 110 are then transmitted to an infrared modulator transceiver 112 for appropriate transmission and reception based upon the transmission/reception settings of the switch 114. The transceiver can also operate to transmit/receive other types of signals including electromagnetic, acoustic or other electromagnetic signal types using conventionally known transceiver hardware.

As previously discussed, both the loaded personality and all mode settings for switches 6 and 1e (Fig. 7) are preprogrammed in the input device 10. Subsequent encoding of such modes and personalities are based upon pre-stored ROM modules containing data adapted to translate information provided from the position switches 100 or to, in turn, translate incoming signals from the transceiver 112.

- 18 -

The modulation plan memory 116 stores, in protected form, information for operation of the user input device 10. The encryption security information module 118 comprises data provided from the personality module ROM 6 to enable operation that environment. Module 118 can be implemented in a ROM which is physically connected to the device 10 by means of a plug-in module 6.

The personality data, in the security environment, for example, includes security or other access safeguards. These safeguards may include control information for the keypad 26 (Fig. 1) which enables external entry of access codes, other keywords or authorization inputs. Another example of the pre-stored personality operating environments 118 for device 10 include a CAD/CAM control environment.

The security safeguard data 118 constrains any user's access to a computer implementing the present invention to the extent of that user's privileges. A related concept is that any user's access to multiple computers can be constrained in an environment where each computer implements the present invention. Likewise, multiple users can access multiple computers, to the extent of their respective access privileges, within a computing group or groups (such as one or more local area networks) or within a wider network of interconnectable computing groups, such as an enterprise-wide computing environment, or such as multiple interconnectable and/or concatenable enterprise-wide computing environments.

Referring now to Figure 4 a detailed block hardware diagram of input device 4 is shown. The elements of the

- 19 -

block diagram include a micro-controller 400 which acts to encode and decode various signals provided to it, including command data and programs which can be read into the micro-controller's RAM (not shown) from the ROMs 116, 118. In addition, the micro-controller receives various input signals from the secondary control switches 1a-1d, the mode control switch 1e, the master control thumb switch 2, and the front toggle switch 3 (not shown). The encoded data from the micro-controller 400 is then provided to or received from the transceiver device 112. The other elements of the input device, which shall be described in greater detail further herein include data input ports 4A and 4B which are adapted to receive data from other devices connected to the input device 10.

Power for the input device 10 is provided through a battery 402 which is adaptable to be recharged via charge and control circuit 404 connected to the female charge plug 11a. As previously discussed, the plug 11a is adapted to be plugged into a male charging plug 11b located on the base transceiver unit 20.

Fig. 5 is a block diagram of the hardware arrangement of the base transceiver 20. The input signals 12 to transceiver 20 are outputs from the computer user input device 10 of Figure 1. More specifically, inputs to base transceiver 20 can comprise, in one embodiment, infrared radiant energy and/or other electromagnetic radiation, optical or acoustic signals 12, comprising user-initiated signals from the transceiver of input device 10.

The signals 12 are received by an infrared transceiver device 210. Alternatively, or in addition, a

- 20 -

sonic or optical transceiver device (not shown) can be implemented in order to facilitate communication with other signal types. The transceiver is connected to an encoder/decoder circuit 212 to decode/encode signals 12, as described above. Demodulation occurs in a reverse manner to modulation, as is common practice. Information for the encoding/decoding device 212 is provided through a memory element 214. The memory element 214 comprises one of several ROM circuit alternatives, one of which (illustrated) includes a predetermined security table 216 while the other includes a programmable security coding module 218 (optional). Furthermore, a ROM or other suitable storage device 220 is employed to provide for modulation/demodulation of data in accordance with the preset modulation scheme contained in the input device 10. As a result, after incoming signals 12 are received by transceiver 210, they are supplied to the encoding/decoding module 212 for subsequent decoding based upon information provided from memory 218 and memory 220. The decoded signals are then outputted from the encoder/decoder 212 to a mode switch position sensing device 225.

The modulation plan contained in memory 220 interfaces with security module memory 218 for security processing of the signal if a security personality has been loaded and enabled in device 10. The demodulated and decrypted signals are outputted from the decoder 212 as inputs to mode and switch position sensing device 225. The device 225 consists of any conventionally known circuit arrangement adapted to both detect all original switches states in input device 10 and to transfer those states to a computer 30. An example of device 225 is a serial-to-parallel shift register or any other suitable buffer.

- 21 -

Demodulated and decrypted intermediate signals transferred into device 225 are initially examined by the mode detection submodule 232 in order to determine which mode (set by switch 1e in Fig. 7) the subsequent signal is based upon. As previously noted, the mode switch settings 1e comprise a multiplicity of different possible signal intelligence generation options stored in the ROM mode table 116. Depending on the mode in which the computer user input device 10 is operating, different data is conveyed in the subsequent portions of the signal being processed.

Also, depending on the personality operating environment implemented through the modules (6a, 6b and 6c of Fig. 7) a plurality of different operating environments are possible, in addition to a plurality of mode settings 1e within each personality environment.

The difference between an operating environment personality 6 and a mode switch setting of switch 1e, as shown in Fig. 7 is as follows: If a user wishes to set a particular operating environment (i.e., security access), he/she does so, in one method, by plugging a ROM module 6 into the input device 10. Contained within an operational environment, such as security access, CAD/CAM, etc. are a plurality of modes 1e each of which, in turn, control the functions designated by switches 1a-1d. For example, in a CAD/CAM operating environment, one selected mode may be "input formatting" when a user wishes to designate various input formats on his computer. As a result, the secondary control switches 1a-1d designate particular functions available in mode setting 1 (i.e., coloring, shading, hatching, providing standardized geometric figures, etc.).

- 22 -

A second mode designated by the switch 1e, for example, would involve an "output formatting" mode with the color, style, and formatting selections being designated by the secondary control switches 1a-1d. Accordingly, multiple operating modes and corresponding switch functions 1a-1d are available for each personality.

After mode detection submodule 225 has determined the mode 1e, the subsequent portions of the signal are relayed to an array of other switch position sensing submodules 234, 236, 238, and 240 corresponding to each implemented switch (1a, 1b, 1c, and 1d) of unit 10. In other embodiments (not shown) additional switch position sensing submodules can be provided to detect various states of the control inputs from device 10's switches. Thus switch 2 and the front switch 3 (Fig. 7) or any other embodiment bearing any other numbers of switch elements may be implemented. Accordingly, each switch on input device 10 implements a part of the signal train 12. Conversely, each switch position sensing submodule 234-240 of module 225 determines signal segments corresponding with each predetermined and presequenced segment of any signal related thereto. According to the present invention, at least as many switch position sensing submodules are implemented in module 225 as necessary to sense all switch signal segments from any computer user input device.

In practice, the computer 30 to be controlled can be accessed by a user input device 10 bearing, any number of position sensing submodules. Correspondingly, register 225 can bear as many switch position sensing submodules (such as 234-240) as computer input devices 10's largest



- 23 -

switch complement within any given enterprise or computing institution.

Fig. 6 illustrates a detailed block diagram showing the construction of the base transceiver 20. As shown, an infrared transceiver 210 is connected to a micro-controller 600. The micro-controller receives information from memories 214 and 220 which respectively store predetermined modulation plan data and security coding or other personality data as desired. Further, a ROM 218 is provided in order to provide the switch position sensing data necessary for encoding or decoding signals 12. The computer is also connected to the computer interface 30.

After signals 12 have been detected by the base transceiver 20 and each implemented submodule within the register 225 has detected their respective signals which indicate the switch position settings, all detection and determination outputs are summed by device 244 in a manner conducive to their conveyance and are converted to an input signal format which is appropriate for controlling events associated with the computer 230. This summed signal 242 is then "packetized" with appropriate start-message and end-message packet delimiters to simplify signal detection. Details of various packetized signals are provided in Figs. 16A and 16B.

As previously noted, the cable 28 connects the summation signal of all determined intelligence from the output of base transceiver 20 to the input of an appropriate input port (not shown) located on the reverse face of computer 30. Upon receipt of the summation signal outputs from base transceiver 20, the computer 30 (via

- 24 -

driver software 33) then interprets the summation signal 42. In response, the computer 30, invokes control over the output of display screen 19 of terminal 18 or otherwise invokes control over any other compatible and connected display device (not shown). The computer can also invoke control over any implemented controllable peripheral device via a direct and dedicated connection and/or via an indirect dedicated or virtual network connection.

Fig. 7 illustrates a detailed perspective view of the input device 10. As previously noted, the input device 10 includes a master control thumb switch 2 which is a primary operating switch for the user's computer controlling commands. This switch can be easily thumb-operated in order to control motion of the computer cursor in all directions 2a, 2b, 2c and 2d in accordance with the cartesian coordinates 17(a), 17(b), 17(c) of Fig. 1 (or other coordinates, e.g. polar coordinates). Three dimensional coordinates along a Z axis (not shown) are also available through the switch 2 when the input device 10 is provided with an appropriate three-dimensional personality choice 6 or mode selection 1e.

In different embodiments (not shown) other switches can be mounted upon the control surface 1. The other switches can vary in number, depending upon the model of computer being interfaced or computer environment being served. Input device 10 in the preferred embodiment, contains four adjacent secondary control switch elements, 1a, 1b, 1c, and 1d. Each of the secondary switches respectively provides a different functional choice to the computer. In other words, switches 1a, 1b, 1c and 1d are analogous to the function keys on a computer keyboard.

- 25 -

On the front face of input device 10 a "click switch" 3 is provided which operates in an analogous fashion to selection switches typically available on "mouse-type" input devices. In the preferred embodiment, the front switch 3 can toggle upward or downward and click "on" so that data upon which the cursor rests is entered into the computer 30. The capacity to perform these and other control actions allows the user to access a variety of control options in the computer 30. In yet other embodiments, the front switch 3 can, from its center position, "click" directly inward one or more times to perform yet other "click" or multiple "click" functions.

The input device 10 does not require strapping to the user's hand, finger, wrist, etc., in order to operate properly. While strapping by means of a "Velcro®" strap 40A and "Velcro®" strap 40B, is useful, the strapping does not affect the basic function of the input device 10. Moreover, other strap designs or arrangements are contemplated. For example, other fastening devices can be used for attachment of the computer user input device 10 to the human hand, wrist, finger, etc., such as a ring or ring-type fastening device, as illustrated in Figures 10A-10B or 11.

Returning to Fig. 7, the mode switch 1e is situated above control surface 1. Mode switch 1e is a sliding switch, which slides from position 1e.1 to position 1e.8, as implemented in the user input device 10. It is emphasized that other implementations for mode switch 1e are contemplated. As previously discussed, the mode switch 1e has significant operational implications in that it sets

- 26 -

the functional mode for the various functions represented by switches 1a-1d. Thus, each position switch 1a-1d can, in turn, be changed eight times depending upon the setting of mode switch 1e. The mode data functions are stored in a memory table, the access of which depends upon the setting of the switch 1e. The changing of the mode switch setting 1e thus significantly changes the operating characteristics of switches 1a-1d and, in turn, the user input device 10.

Still referring to Figure 7, a lens 8 or any other appropriately implemented signal transmissive means for predetermined selected infrared or other signal type 12 is provided. At the end of lens 8, an acoustic signal emission port 41 is illustrated. The computer user input device 10 implements an acoustic emission and detection option. The acoustic port 41, in conjunction with acoustic signal generation means, can emit predetermined selected acoustic signals, when enabled. Where implemented, port 41 requires a corresponding implementation of port 42 on base transceiver 20 of Fig. 1. Port 42 is an acoustic detector, and acoustic signals (not shown) emitted from port 41 are detected therewith. Any known conventional acoustic transceiver hardware can be used.

Referring still to Figure 7, the personality module 6a is shown loaded into the input device 10. The personality module 6a can be easily removed from the personality module cabinet 6. The module consists of, for example, a ROM having stored within it the various predetermined functions and data associated with the operating environment choice. Depending upon the personality module selected by the user, different primary

- 27 -

operating "personalities" of the computer user input device 10 can be chosen by the computer user.

In Figure 7, alternative personality modules 6b and 6c can be selected by the computer user to implement different fundamental operating environments. Other personality modules (not shown) can also be used to replace installed personality module 6a simply by removing module 6a from cabinet 6, and inserting either module 6b or module 6c (or any other module). In another embodiment (not shown) a miniature personality module comprising a thin flat storage device can be loaded. One or more such miniature personality modules can be stored in a shelf 60 located on the input device.

A data input port 4a can also be used for a variety of data inputs. For example, the port can be used to input data directly into one of the ROM areas. The input port 4a allows the computer user input device 10 to import or export security data such as access authorization codes, or allows the import or export of other data.

Referring now to both Figures 8 and 9, these figures differ only in the means for attaching the input device 10 to the user's hand. The means for attaching input device 10 to the computer user's finger can be implemented by a pair of "Velcro®" straps, such as strap 40a and strap 40b in Figure 8. In contrast, in Figure 9, the means for attaching the computer user input device 10 to the computer user's finger can be a releasably secured ring 50. Figures 10A and 10B shows the input device 10 worn on the user's index finger.

- 28 -

Referring to Fig. 11, a second arrangement 1100 of the input device is shown on a user's finger. The device is a simplified version of device 10 and includes only a thumb switch 1102 which operates in a similar fashion to switch 2.

Referring now to Figure 12, a series of different, sequential examples of cursor movement events are shown. In screen 1204a, the default position, 1217a, is shown in the center of the screen. Screen 1204a is always the beginning screen of a cursor reinitialization sequence. Default position 1217a is always presented to the computer user with any basic cursor reinitialization control sequence, unless an alternative default position is customized by the user. Reinitialization of the cursor is accomplished by, for example, using the function switches 1a-1d. Secondary successive screens show a progression of directional cursor moves as well as some "click" and "click and drag" sequences from the menu options, using switches 2 and 3. For example, directional pressure on switch 2 moves the cursor up in the direction of direction 2a; cursor right, 2b; cursor down, 2c; and cursor left, 2d (see Fig. 7). Other directions are possible and can be implemented with appropriate switching circuitry.

Referring now to Figure 13, a flow chart example of a possible sequence of events 1300 of one personality environment 6 is shown. In this example, the computer user who desires access to any computer 300 equipped with the present invention is designated as an "annunciator", and the logic used by the security module contained in the base transceiver 20 and input device 10 is designated as an "interrogator".

- 29 -

The process begins by having the interrogator start operation of the authorization program at step 1302. The sentry monitor transaction monitor routine then occurs at step 1304. At step 1306 the interrogator then tests to see if a annunciation/initiation signal has been received from the annunciator. The annunciator can only send a signal after it enters the annunciator routine by selecting the appropriate mode switch 1e and function switches 1a-1d.

The annunciator routine starts at step 1308 where the user must provide annunciation signal 1310. The annunciator then transmits the annunciation signal at step 1312. When the annunciation signal is received, the process for identifying the annunciator begins at step 1314. At step 1316 the interrogator then generates a "Who Are You" inquiry to the annunciator device. Once the annunciator signal is received at step 1320, the annunciator then begins to process the "Who Are You" identification request. If the "Who Are You" signal is not received, then the annunciation signal is regenerated at steps 1310, 1312.

The annunciator "Who Are You" identification process begins at step 1324 where identification information is fetched from the memory 1322 contained in the annunciator. Once an identification code has been read from a memory 1322, it is transmitted at step 1324 to the interrogator. The interrogator then tests to see if the ID has been received at 1328. If not, then at step 1328, the interrogator loops back N number of time to reinitiate the identification process. Once the N number of loops have

- 30 -

been exceeded, however, then an alarm routine is called at step 1330.

If, on the other hand, the ID has been received, then the authentication process initiates at step 1332 where ID data is read from an authenticator memory 1336 by virtue of the authentication read module 1334. An ID status message is then produced at step 1338 and the ID is then compared to see if it is contained within the authenticator memory at step 1340. If not, then the authenticator ID again tested at step 1342 and if the test indicates that the ID is not authorized, then the alarm routine is called at step 1344.

If, however, the ID is considered to be correct then at step 1346 the computer enabling process is entered. Two events then occur: First, the annunciator process is enabled at step 1348; second, the interrogator computer is enabled at step 1330.

The annunciator enable 1348 then transmits the enabled signal at step 1352. On the annunciator side, the enable process is initiated at step 1354. Before any enablement occurs, however, the system tests at step 1356 whether more work is being done. If the answer is yes, then the system will loop back till that work is completed and, once enabled, it will end the routine.

In the interrogator, if the computer enable routine 1350 occurs, the system tests to see if the transaction to be enabled is legal. If it is, then the system is tested to see if there is more work being performed at step 1364 and the system then loops back at step 1366 to the



- 31 -

transaction sentry monitor. However, if no more work is being performed then at step 1368, the routine is completed and the function is returned to the main menu.

In the event an alarm is sounded at steps 1370, 1344 and 1330, as previously described, an alarm test routine 1380 is entered. This routine, which occurs at the annunciator side, verifies the disable signal by entering the process at step 1388. At step 1384 the process recheck occurs where identification is rechecked against the annunciator memory at step 1386. If the recheck is successful at step 1390, then the annunciator signal is sent to the interrogator where the identification process 1326 begins again. If after two tries, however, no identification is found or the identification is wrong, then at step 1392 it is determined whether the device needs to be reenabled. If yes, the process enable routine 1340 occurs. However, if not, the alarm routine checks the memory 1322 and provides the annunciator with the appropriate indications of a default and disable.

An added feature of the input authorization personality 1300 is provided in box 1400. In this box, when the alarm routines 1394 are tested, a copy of all dialogues is sent at step 1402 to the interrogator or a sentry monitor 1404 and the memory 1336 is checked to see if other alarm conditions or messages or other intervention actions are possible. Thus, in this example, alarm conditions are handled by the interrogator.

The present invention has a virtually unlimited capacity to enable extensive multiple-level security programs. Security can be physically implemented using

- 32 -

keypad 26 of transceiver 20, and/or electronically implemented by installing the input device 10 with electronic access codes and access can additionally be constrained by virtue of loading a specific security access personality module 6 into cabinet 60.

Referring now to Figure 14, groups of computers are shown arrayed within a computing institution or enterprise. The properly authorized user of the present invention can gain access to any computer which has implemented the present invention, under the overall organizational auspices of an all-encompassing security safeguarding program.

Throughout this document, the term "transceiver" has been used to illustrate that according to the present invention, both a "transmitter" and a "receiver" are provided together in close proximity for two-way, or "duplex" operation (i.e., base transceiver 20 has both a transmitter and a receiver contained within the same electronic enclosure, as both transmission and reception of signals are provided therein). By like reasoning, the user input device 10 can also be designated as a "transceiver" given its duplex communications capability shown by "kill circuit" and other "receiver" functions.

Referring now to Figure 15, an extended enterprise-wide computer control system is illustrated. Figure 15 shows six sets of twenty computers. Each of these "local" six sets of computers is directly associated with ten local computer user input devices. In this particular case, all twenty computers local to each set can be controlled by all ten local computer user input devices associated with each

- 33 -

individual set. Figure 15 thus illustrates an implementation of the present invention which has subdivided an enterprise-wide group of one-hundred twenty computers into six operating groups which operate in a mutually exclusive fashion. Separately, shown to the left of the 120 computers are four grandmaster input devices 10, labelled I, II, III, and IV. Each of these grand master input devices can access all one-hundred twenty of the enterprise's computers.

Figure 15 therefor exemplifies an enterprise which has several separate operating groups of computers; in this example, there is no need for operators in any group to have access to any other group, since only the four grandmaster global input devices have access to all one-hundred twenty computers. Each group of ten computer input devices could be implemented to access other groups of computers; but in this implementation, only grandmasters access all six groups.

Figures 16A and 16B each respectively illustrate examples of packet byte maps for different personality modes for the system.

Although only a preferred embodiment is specifically illustrated and described herein, it will be apparent that many modifications and variations of the present invention are possible in light of the above teachings and within the purview of the appended claims without departing from the spirit and intended scope of the invention.

WHAT IS CLAIMED IS:

1. A computer control system, comprising an input device operable by a user, means operable by said input device to radiate signals, means to sense said radiated signals, and a computer having means to receive such signals and programmed to respond to them, the computer input signal being transmissible from the signal radiating means to the computer without use of any hardwire connection therebetween.

2. The computer control system of Claim 1, wherein said input device comprises a first transceiver.

3. The system of Claim 1, wherein said means operable by said input device comprises at least one manually operable element means for making at least one electrical connection to said means to radiate signals.

4. The system of Claim 3, wherein each said at least one manually operable element means can be operated in more than one basic operating mode.

5. The system of Claim 4, wherein each of said more than one basic operating modes comprises a different selectable intermediate electrical connection means for making a correspondingly different selected intermediate electrical connection from said manually operable element means to said means to radiate signals, prior to making a final electrical connection to said means to radiate signals.

- 35 -

6. The system of Claim 5, wherein each of said basic operating modes is selected using a manually operable basic mode selector element means.

7. The system of Claim 1, wherein said means to sense said radiated signals comprises a second transceiver.

8. The system of Claim 7, wherein said second transceiver comprises additional means to radiate signals, either independent of, or in response to, said first transceiver initiated radiated signals.

9. The system of Claim 8, wherein said second transceiver initiated radiated signals can be sensed by additional sensing means included within said first transceiver.

10. The system of Claim 9, wherein said second transceiver initiated radiated signals sensed by said first transceiver sensing means can effect feedback and control events in said first transceiver, including control events which can disable operation of said first transceiver.

11. The system of Claim 1, comprising said first transceiver and said second transceiver which are together bidirectionally operable as a two way transceiver system.

12. The system of Claim 11, wherein said two way transceiver system comprises means to simultaneously bidirectionally operate or to non-simultaneously bidirectionally operate, said bidirectional operability being initiatable either by said first transceiver or by said second transceiver.

- 36 -

13. The system of Claim 12, wherein said bidirectionally operable two way transceiver system comprises said means to radiate signals, said means to sense said radiated signals, means to modulate said radiated signals, means to modulate said radiated signals to produce selected predetermined different modulated signals, means to determine which of said selected predetermined different modulated signals has been sensed by said sensing means, means for conversion of said sensed signals into different information signals to which said computer is programmed to respond, means for relaying said different information signals into a signal input port on said computer, and means for processing said different information signals within said computer to produce correspondingly different electrical signals to invoke different events of computer control including different computer screen display events upon a computer display screen responsive to said different electrical signals from said computer, and means to display said different events of computer control upon a computer display screen responsive to said produced electrical signals, when said two way transceiver system operates at the initiation of said first transceiver.

14. The system of Claim 1, wherein said input device has means which allow it to radiate signals to at least one signal sensing means, said at least one signal sensing means comprising means for accessing and controlling at least one computer, in accordance with a predetermined input device access and authorization privileges plan.

- 37 -

15. The system of Claim 14, wherein said predeterminedly configured input device, to the extent of its control privileges allowable by said predetermined input device access and authorization privileges plan, is operable by at least one user to control said at least one computer, to the extent of said at least one user's individually assigned access and authorization privileges as predetermined in a user access and authorization privileges plan.

16. The computer control system of Claim 14, wherein said predeterminedly configured input device is a member of at least one group of similar input devices, said at least one group also comprising predeterminedly configured input device group members, each of which said input device group members are individually and predeterminedly assigned access and authorization privileges exclusive of any access and authorization privileges assigned to any user.

17. The computer control system of Claim 1, comprising additional computers, additional users capable of controlling said additional computers, and additional input devices as means to control said additional computers.

18. A computer control apparatus, comprising an input device operable by a user, means operable by said user to radiate signals, means to receive said radiated signals, and a computer having means to receive such signals and programmed to respond to them, the computer input signal being transmissible from the signal radiating

- 38 -

means to the computer without use of any hardwire connection therebetween.

19. The computer control apparatus of Claim 18, wherein said means to radiate signals comprises a hand attachable computer user input device which is manually operable using any metacarpal of the hand in accordance with any specific embodiment employed as an encasing means to enclose said means to radiate signals therewithin.

20. The system of Claim 11, wherein said two way transceiver system can be dependently or independently integrated with and interconnected into other networked or networkable communications systems as means for extending the utility of said other systems, wherein means for said integration with an interconnection into said other systems comprises one or more physical, electrical, logical, and/or other networkable integration and/or interconnection means.

21. The system of Claim 11, wherein said two way transceiver system comprises means for creating specialized displays upon a computer display screen when configured with appropriate hardware and software means to produce said specialized displays.

22. The system of Claim 21, wherein said appropriate hardware and software means to produce said specialized displays can be explicitly customized and installed into either said first transceiver, or said second transceiver, or both said first transceiver and second transceiver in accordance with an installation configuration most appropriate for the user environment implementation.



- 39 -

23. The system of Claim 3, where in said means operable by said input device includes at least one master control thumb switch, most easily controllable by the user's thumb, said thumb switch comprising means to make different and/or multiple electrical connections to said means to radiate signals, and wherein said means operable by said input device may also include at least one manually operable element which can be most easily controllable by the user's index finger.

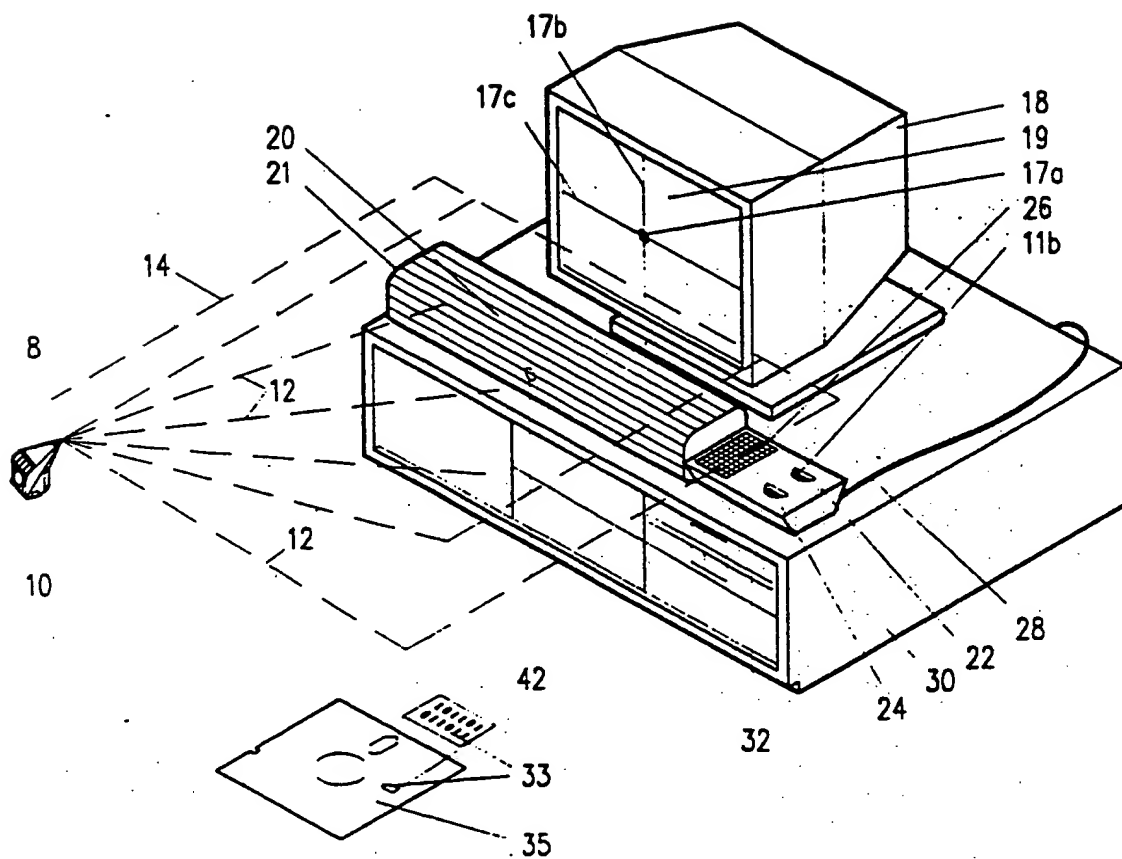


FIGURE 1

SUBSTITUTE SHEET

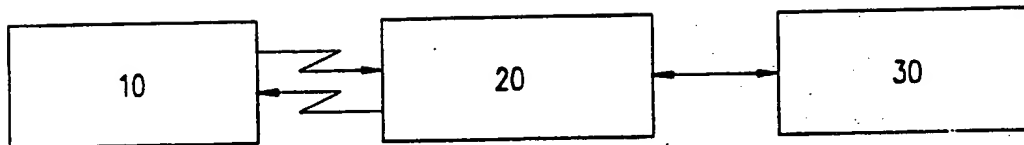
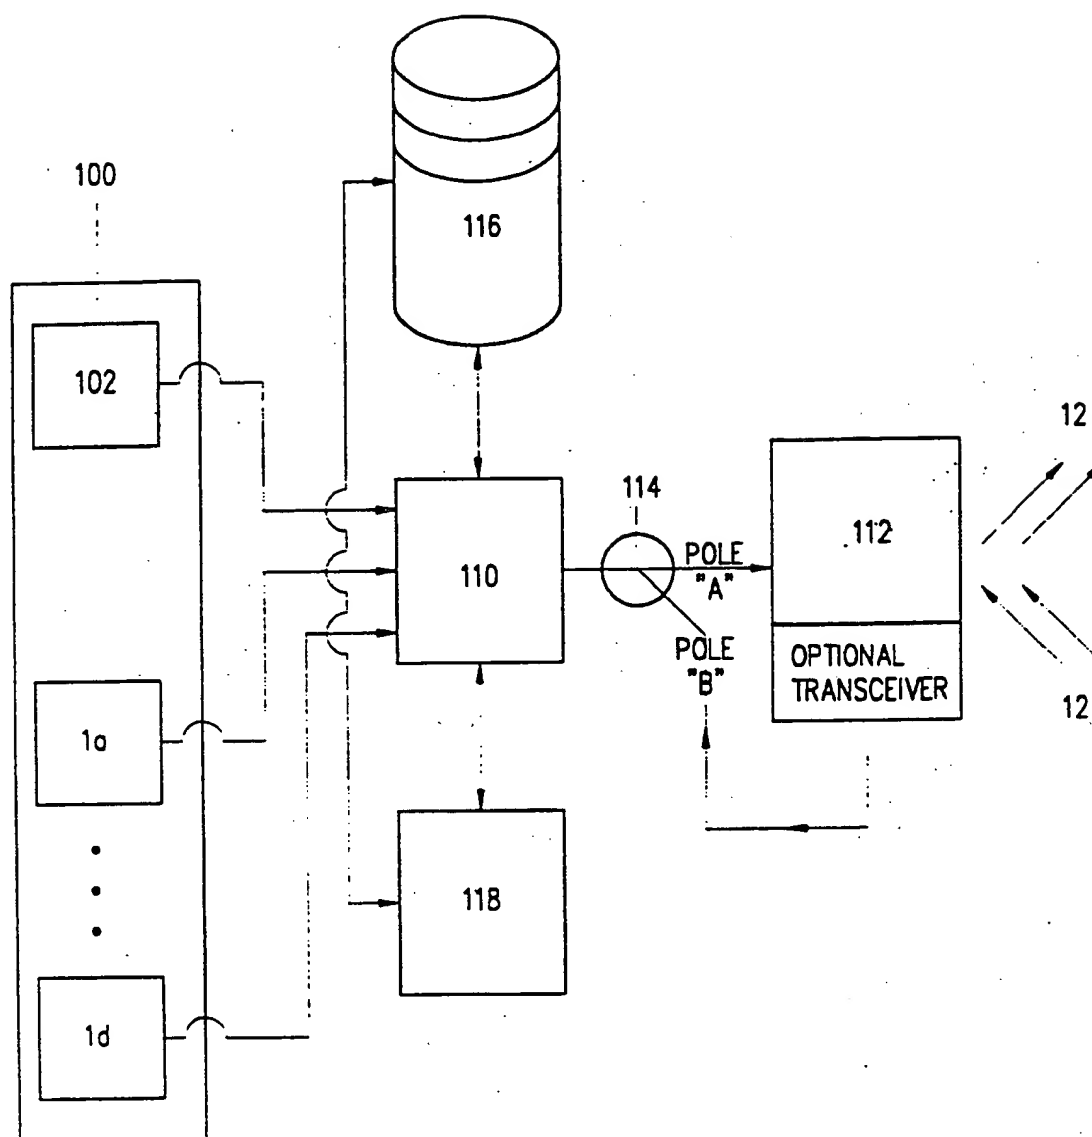


FIGURE 2

**SUBSTITUTE SHEET**

FIGURE 3

SUBSTITUTE SHEET

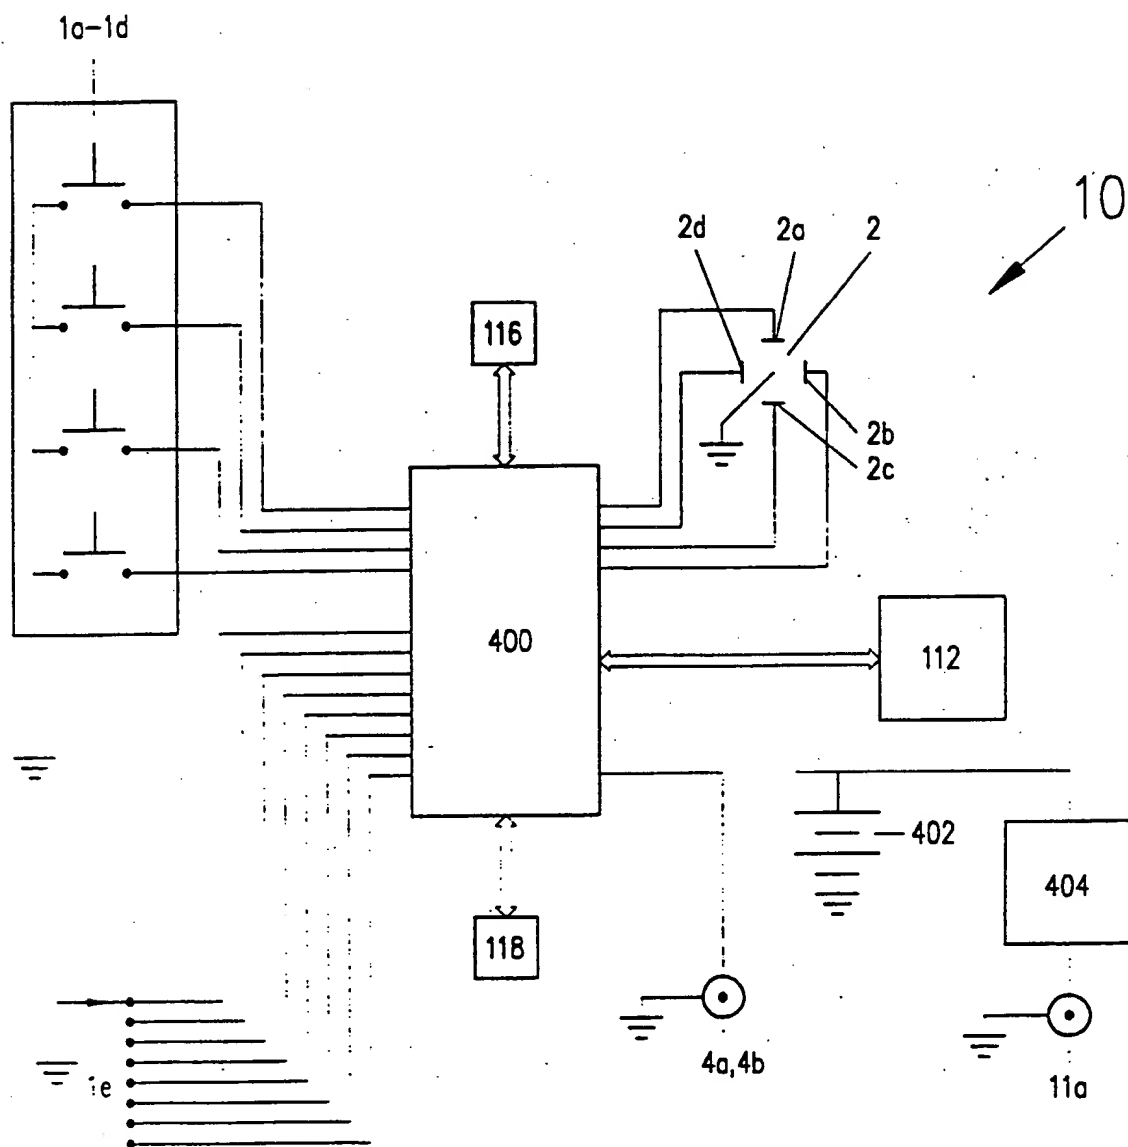
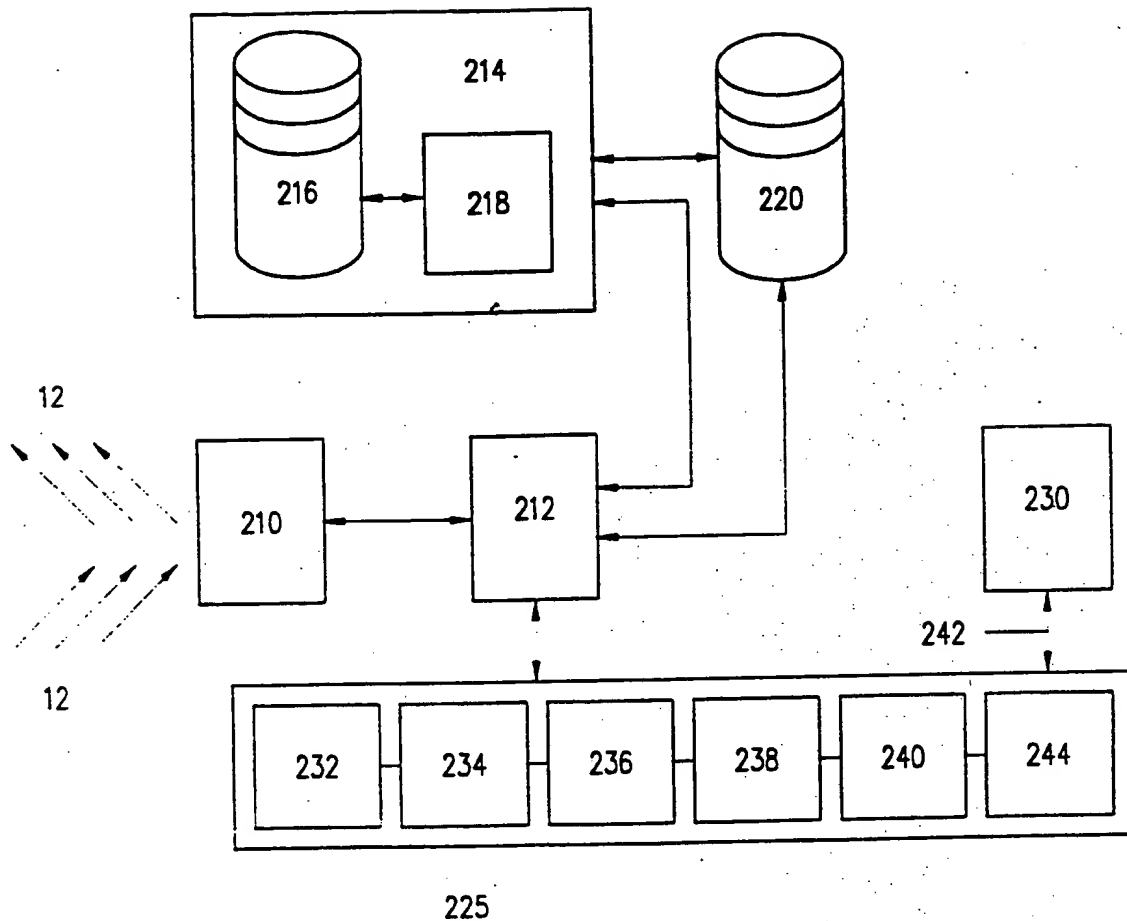



FIGURE 4

SUBSTITUTE SHEET

FIGURE 5


SUBSTITUTE SHEET

6/18

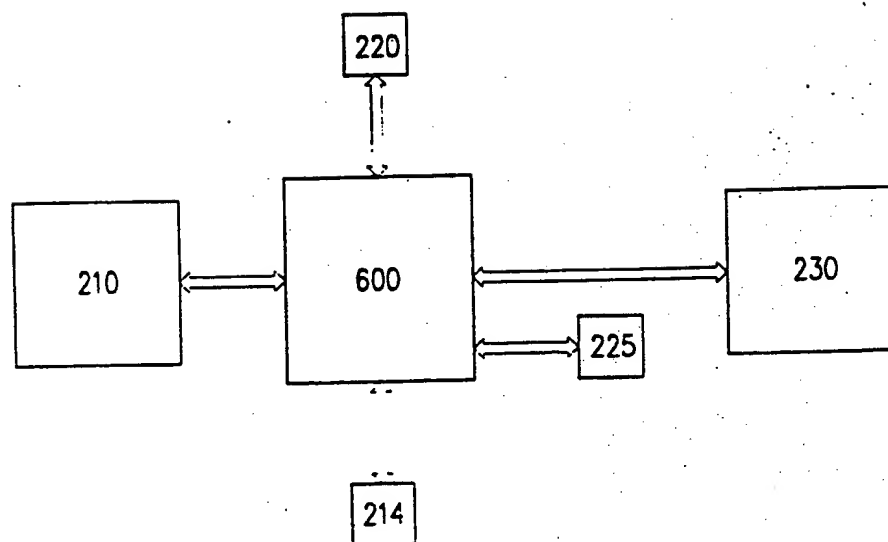FIGURE 6

SUBSTITUTE SHEET

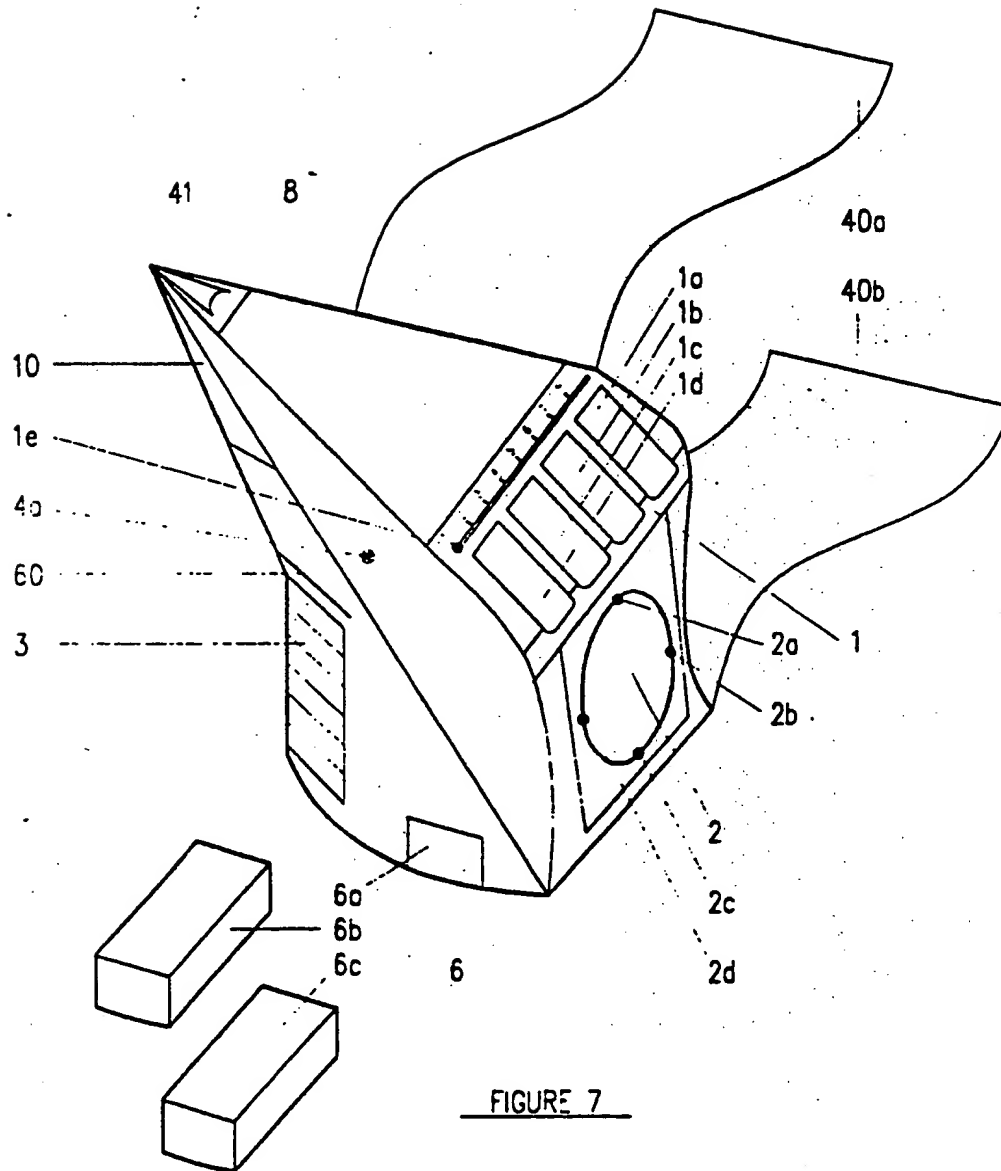7/18



**SUBSTITUTE SHEET**



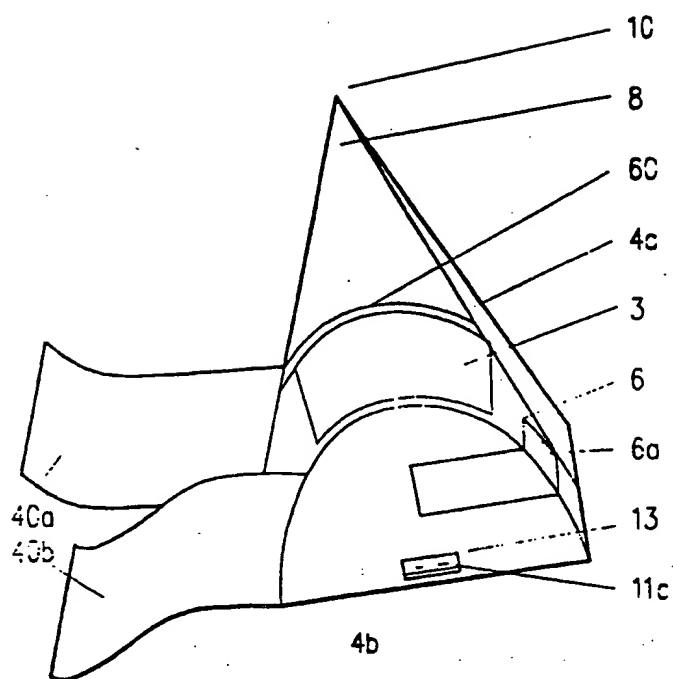


FIGURE 8

SUBSTITUTE SHEET

9/18

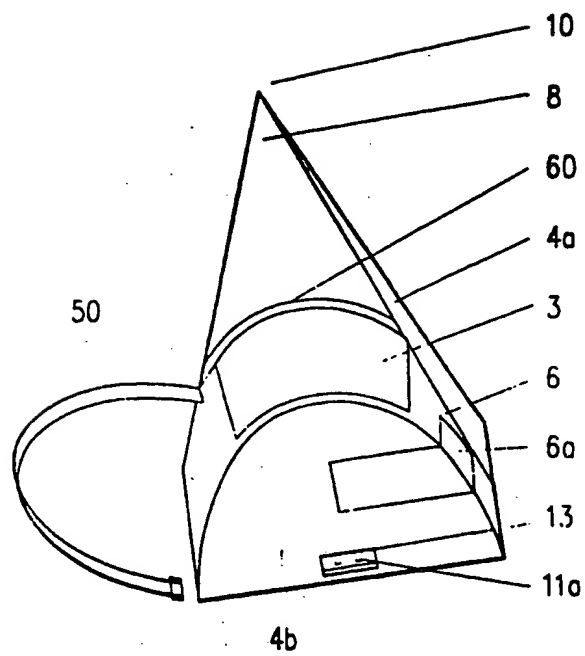


FIGURE 9

**SUBSTITUTE SHEET**

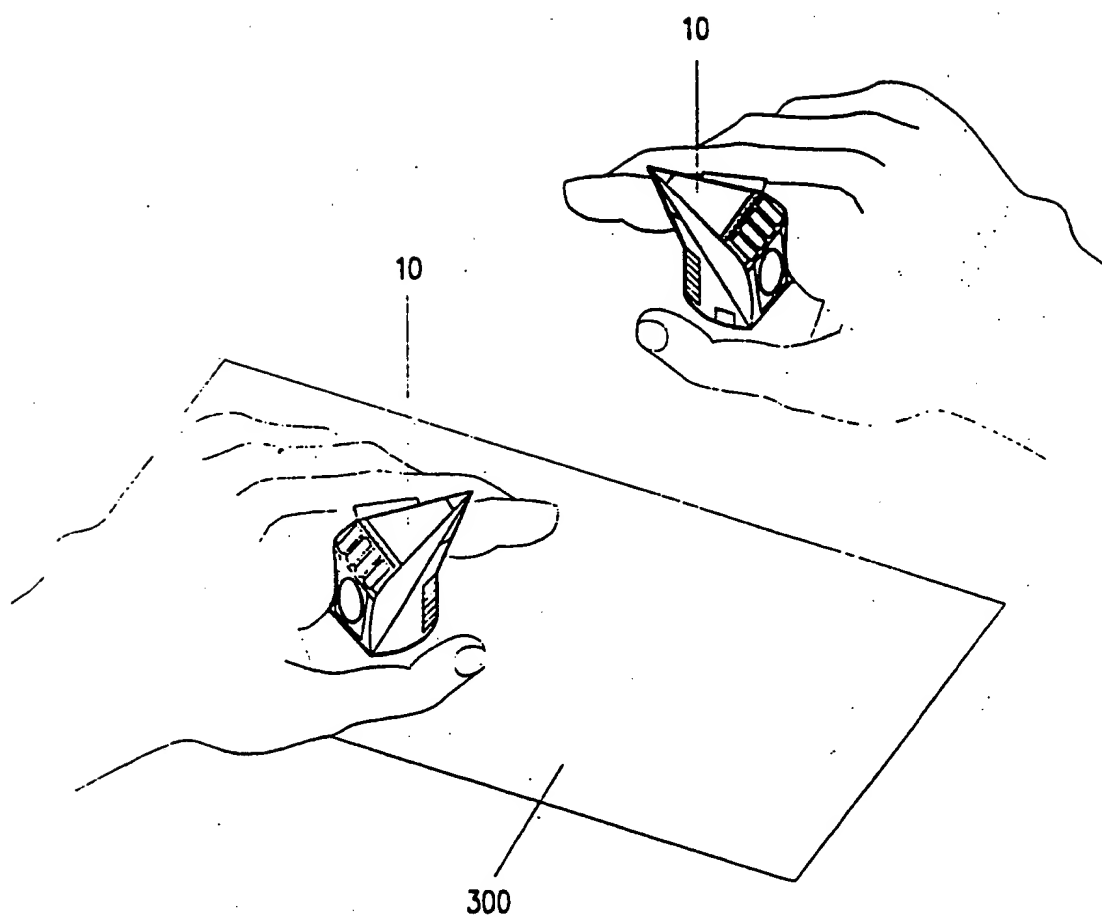


FIGURE 10A

**SUBSTITUTE SHEET**

11/18

10

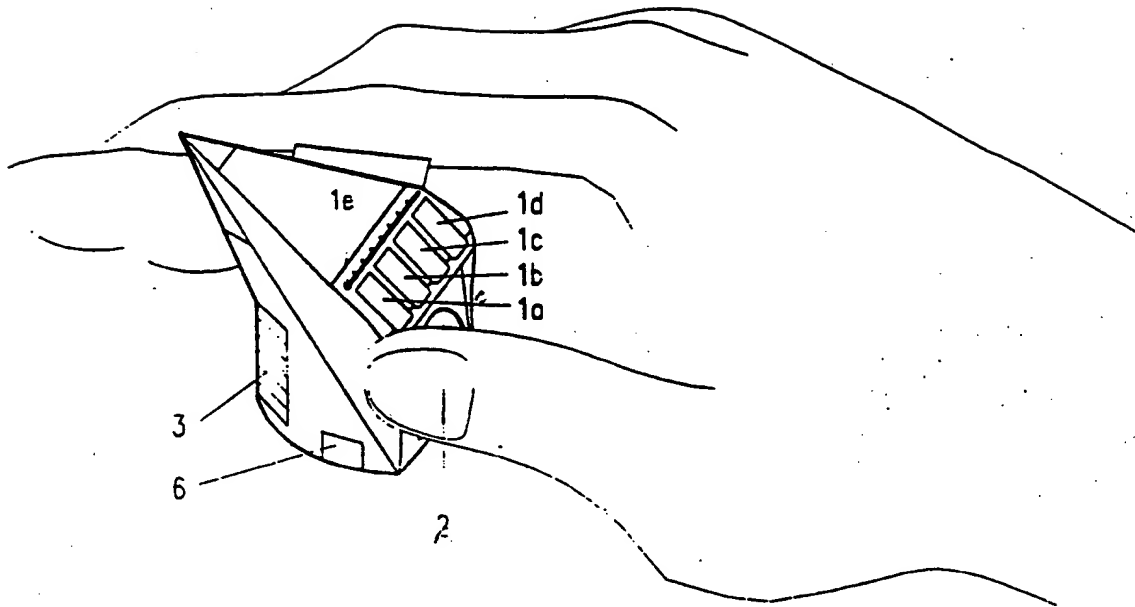


FIGURE 10B

SUBSTITUTE SHEET

12/18


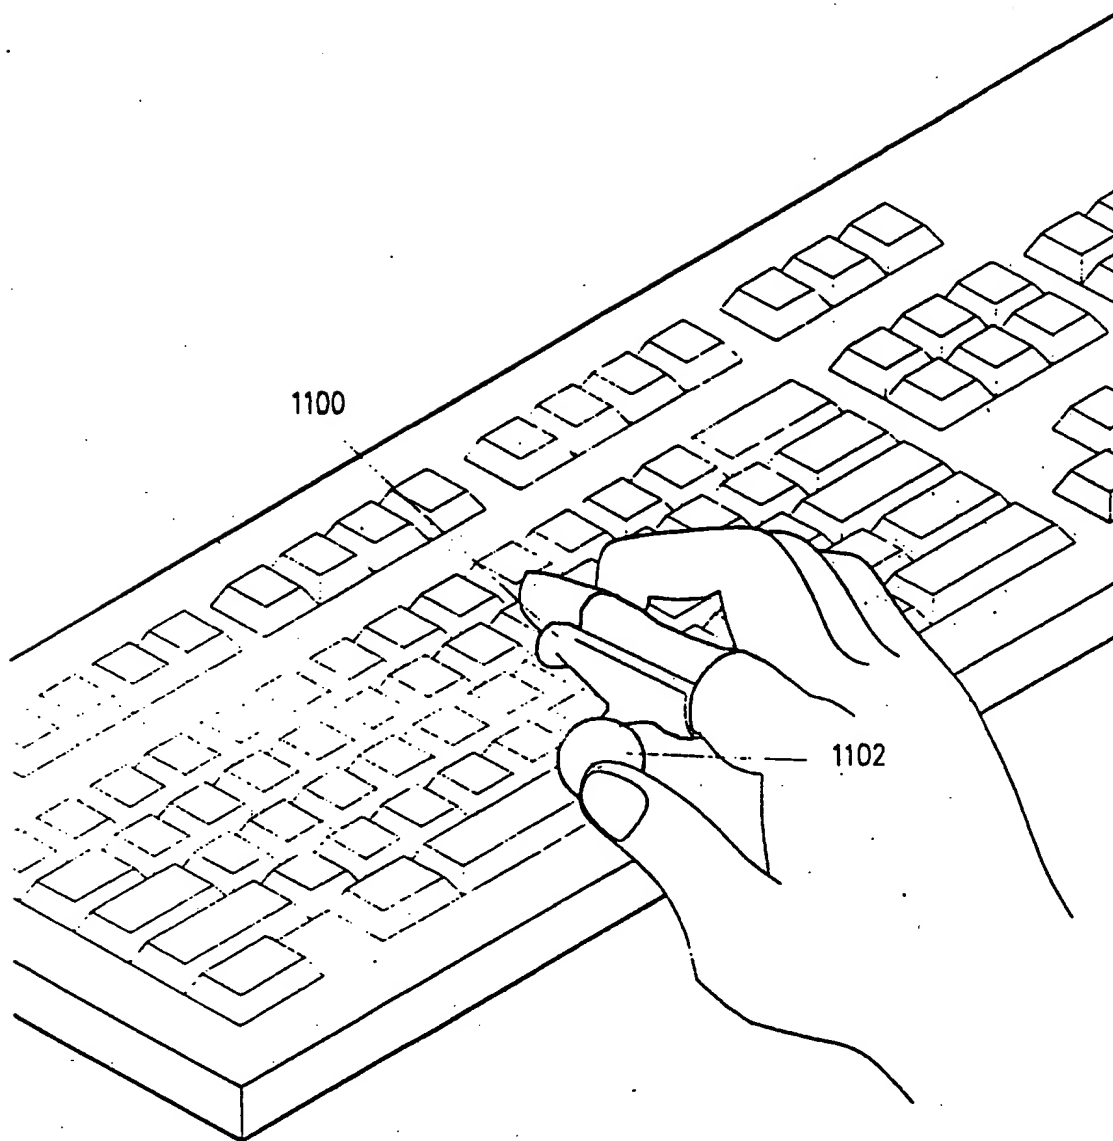



FIGURE 1'

**SUBSTITUTE SHEET**

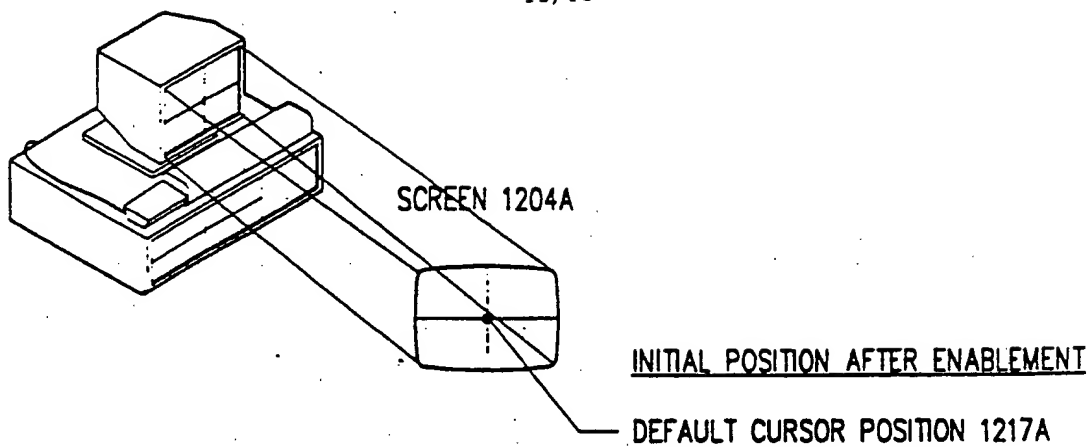
13/18



SCREEN 1204B

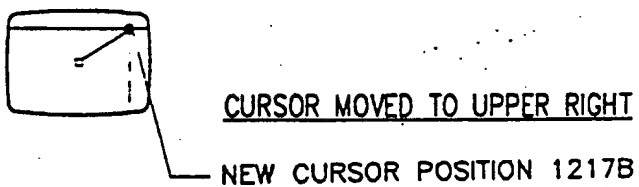

SCREEN 1204C

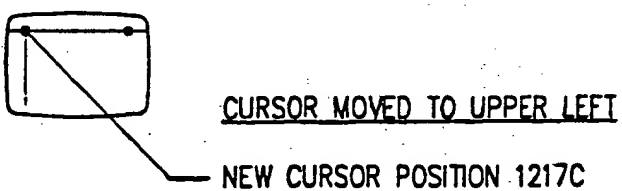

SCREEN 1204D

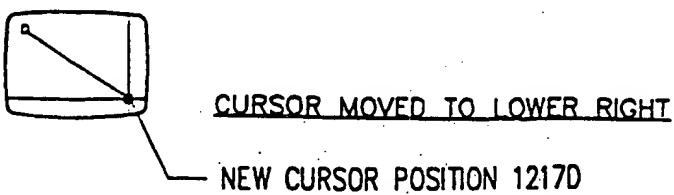


FIGURE 12


**SUBSTITUTE SHEET**

14/18

## ANNUNCIATOR

INTERROGATOR



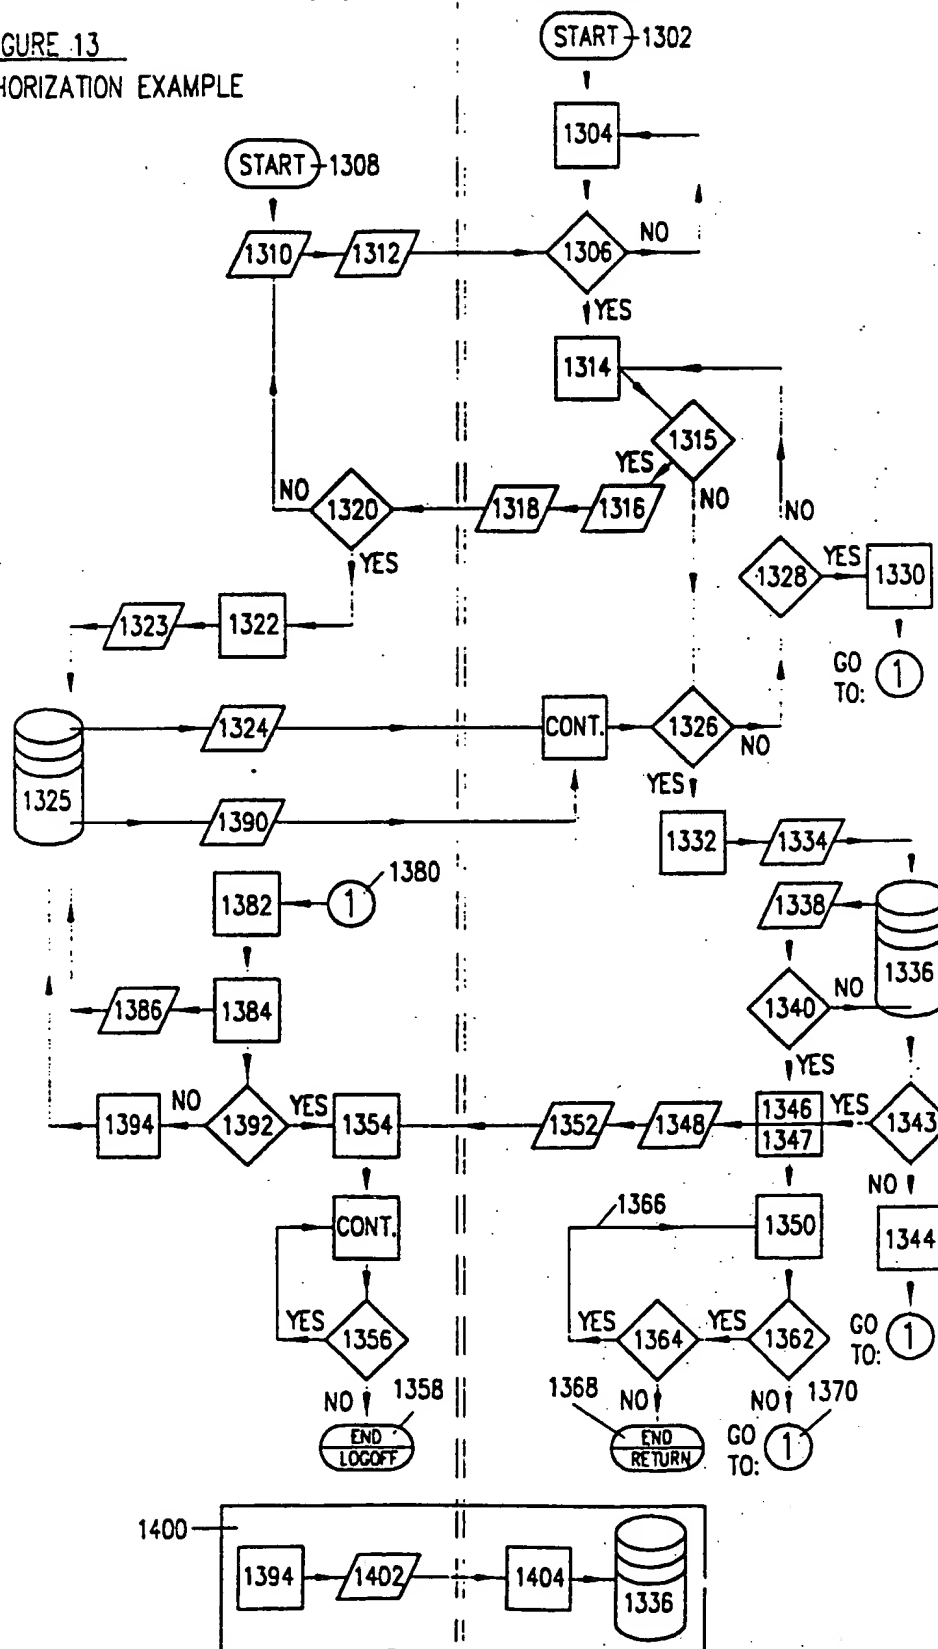







FIGURE 13  
INPUT AUTHORIZATION EXAMPLE




# SUBSTITUTE SHEET

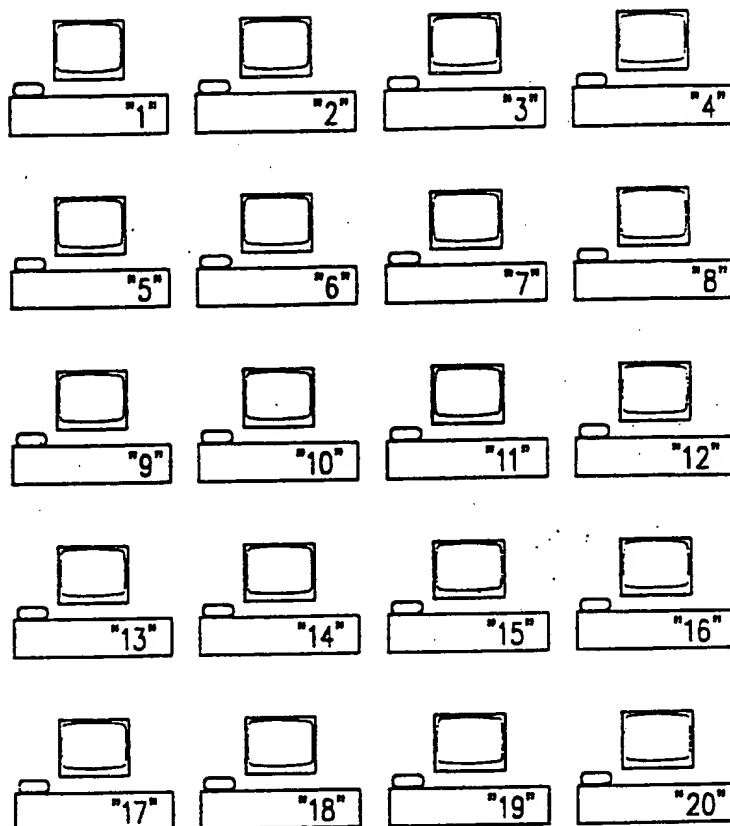15/18

INPUT  
DEVICES:

101   
 102   
 103   
 104   
 105   
 106   
 107   
 108   
 109   
 110 



<u>CUID#</u>	<u>AUTH. COMPUTER(S)</u>	<u>AUTH. LEVEL(S)</u>	<u>USER NAME</u>
101	ALL	ALL (I-V)	SYSTEM ADMIN/GRAND MASTER
102	"2, 3, 4, 5, 6"	I, II	DATA ENTRY
103	"2, 3, 4, 5, 6"	I, II	DATA ENTRY
104	"2, 3, 4, 5, 6"	I, II, III	DATA ENTRY SUPERVISOR
105	"9, 10, 11"	ALL	ENGINEERING
106	"9, 10, 11"	ALL	ENGINEERING
107	"9, 10, 11, 12, 13"	ALL	ENGINEERING SUPERVISOR
108	ALL	I, II	DATA COMMUNICATIONS
109	"13, 14, 15, 16"	I, II, III	PERSONNEL
110	"17, 18, 19, 20"	I, II, III	ADMINISTRATION

FIGURE 14

SUBSTITUTE SHEET




GRAND  
MASTER I



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204

17/18

## HIGH-LEVEL SECURITY PERSONALITY

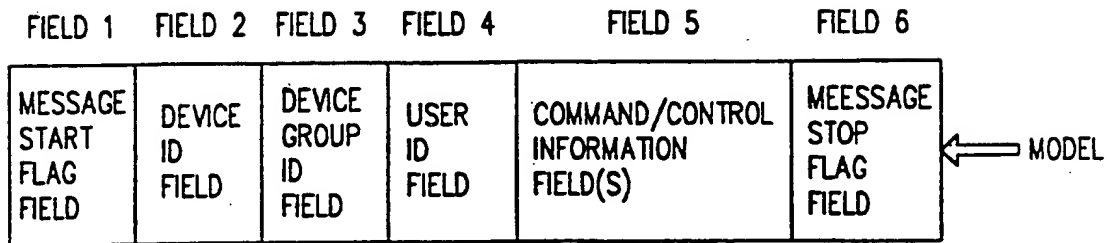

## FIELD:

- 1 WAKE-UP DETECTION CIRCUITRY / MESSAGE FOLLOWS /
- 2 UNIQUE DEVICE ID & TIME-STAMP & PRIVILEGES
- 3 UNIQUE DEVICE GROUP ID & TIME-STAMP & PRIVILEGES
- 4 UNIQUE USER ID & TIME-STAMP & PRIVILEGES
- 5 USER COMMAND/CONTROL SIGNAL

2D.1	CONTROL/SIGNAL MESSAGE PACKETS	}	2D	1.01
				1.02
				⋮

FIGURE 16A**SUBSTITUTE SHEET**

18/18

## HIGH LEVEL CAX PERSONALITY

	FIELD 1	FIELD 2	FIELD 3	FIELD 4	FIELD 5	FIELD 6	FIELD 7
MODEL →	MESSAGE START FLAG FIELD	USER ID FIELD	DESIGN MODE ENVIRONMENT FIELD	DESIGN BASIC ACTIVITY FIELD	BASIC ACTIVITY LAST STATE FIELD	BASIC ACTIVITY CURRENT STATE ("DELTA") FIELD	OTHER RELEVANT INFO

## FIELD:

- 1 WAKE-UP DETECTION CIRCUITRY / MESSAGE FOLLOWS /
- 2 USER'S UNIQUE ID
- 3 DESIGN MODE

MANUFACTURING DESIGN  
ELECTRICAL ENGINEERING DESIGN  
ARCHITECTURAL DESIGN  
MUSICAL NOTATION  
ETC.

- 4 BASIC ACTIVITY

INSERT  
DELETE

FIGURE 16B**SUBSTITUTE SHEET**

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US90/06823

## I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) <sup>3</sup>

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC (5) : H03M 11/00; H04B 10/00

U.S. CL : 341/20,22; 340/825.72,706

## II. FIELDS SEARCHED

Minimum Documentation Searched <sup>4</sup>

Classification System |

Classification Symbols

U.S. 341/20,22,176; 340/825.69,825.69825.72,706,709,711;  
455/603,617,608

Documentation Searched other than Minimum Documentation  
to the Extent that such Documents are Included in the Fields Searched <sup>5</sup>

## III. DOCUMENTS CONSIDERED TO BE RELEVANT <sup>14</sup>

Category <sup>6</sup>	Citation of Document, <sup>15</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>16</sup>
X Y	US,A 4,812,842 (BAYERLEIN ET AL) 14 March 1989 See the entire document.	1-12,17,18,19 13-16,20-23
A	US,A 4,897,821 (THIERRY ET AL) 30 January 1990 See Column 2, Lines 41-65; Column 3, Line 53; Column 4, Line 55.	1-13,17-22
A	US,A 4,641,374 (OYAMA) 03 February 1987 See the entire document.	1-13,17-22
A	US,A 4,682,159 (DAVISON) 21 July 1987 See Column 2, Lines 46-61.	1-7,17-19

(con't)

<sup>18</sup> Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

## IV. CERTIFICATION

Date of the Actual Completion of the International Search <sup>19</sup>

05 FEBRUARY 1991

International Searching Authority <sup>20</sup>

ISA/US

Date of Mailing of this International Search Report <sup>21</sup>

22 FEB 1991

Signature of Authorized Officer <sup>22</sup>

YUK H. LAU

## FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

A	US,A 4,754,268 (MORI) 28 June 1988 See Column 1, Line 43; Column 2, Line 49.	1-7,17-19
A	US,A 4,924,216 (LEUNG) 08 May 1990 See Column 1, Line 25; Column 2, Line 10.	1-7,17-19
A	US,A 4,628,541 (BEAVERS) 09 December 1986 See the entire document.	1-7,17-19

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE<sup>1</sup>

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers \_\_\_\_\_, because they relate to subject matter not required to be searched by this Authority, namely:

NONE

2. ☐ Claim numbers \_\_\_\_\_, because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out<sup>1</sup>, specifically:

NONE

3. ☐ Claim numbers \_\_\_\_\_, because they are dependent claims not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING<sup>2</sup>

This International Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.
2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:
3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:
4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

## Remark on Protest

- ☐ The additional search fees were accompanied by applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**